




# SURVEY PLAT


THIS PLAT OF SURVEY MEETS THE OKLAHOMA MINIMUM STANDARDS FOR THE PRACTICE OF LAND SURVEYING AS ADOPTED BY THE OKLAHOMA STATE BOARD OF REGISTRATION FOR PROFESSIONAL ENGINEERS AND LAND SURVEYORS.

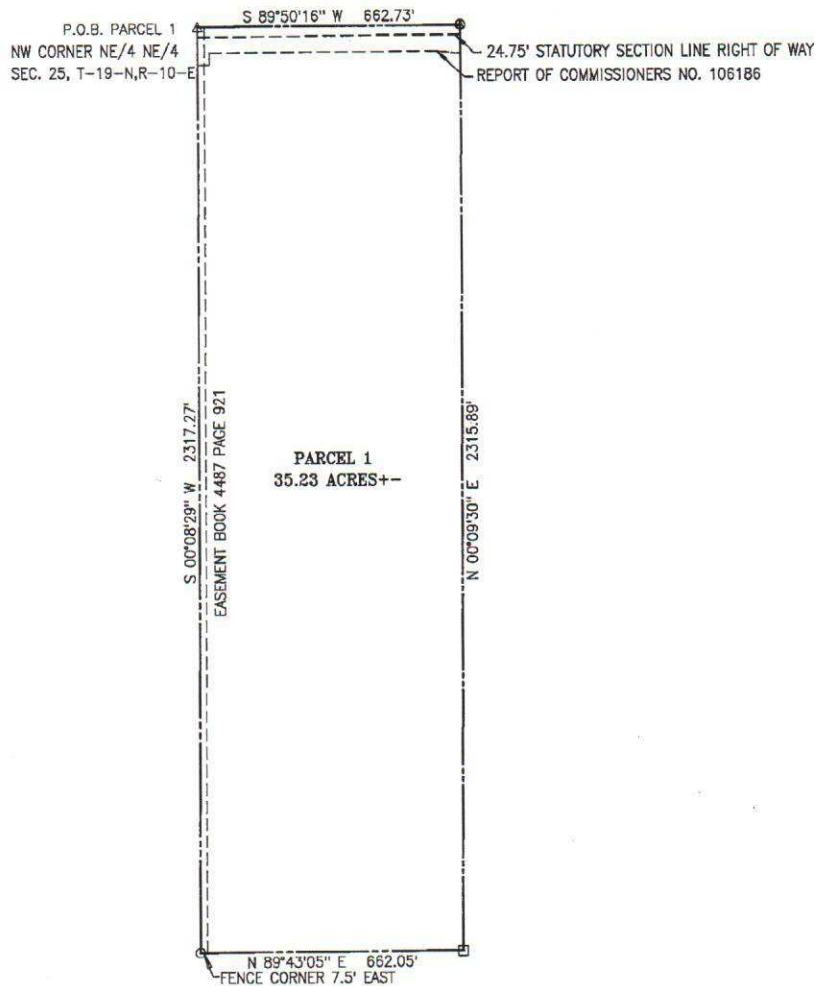

BASIS OF BEARINGS: TRUE BEARINGS DERIVED FROM GPS OBSERVATIONS

- ▲ DENOTES FOUND MAG NAIL
- DENOTES SET MAG NAIL W/FLASH
- ▣ DENOTES SET 1/2" IRON PIN W/CAP
- DENOTES FOUND IRON PIN

THE WORD CERTIFY OR CERTIFICATE AS SHOWN AND USED HEREON MEANS AN EXPRESSION OF PROFESSIONAL OPINION REGARDING FACTS OF THE SURVEY AND DOES NOT CONSTITUTE A WARRANTY OR GUARANTEE, EXPRESSED OR IMPLIED.



## CERTIFICATE

I, Brett King, the undersigned, a Registered Professional Land Surveyor L.S. 1533, in the State of Oklahoma, of Landmark Surveying, C.A. 4572 6-30-17, of 245 South Taylor, P.O. Box 1328, Pryor, Oklahoma (918-825-2804) do hereby certify that a careful survey of the following described property was made under my supervision:

A tract of land being a part of the East Half of the Northeast Quarter of Section 25, Township 19 North, Range 10 East of the Indian Meridian and Principle Base Line, Tulsa County, Oklahoma, and being more particularly described as follows: Beginning at the Northwest corner of the Northeast Quarter of the Northeast Quarter, thence S 00°08'29" W 2317.27 feet to a 1/2" iron pin; thence N 89°43'05" E 662.05 feet to a 1/2" iron pin; thence N 00°09'30" E 2315.89 feet to a MAG nail on the North line of the Northeast Quarter; thence S 89°50'16" W 662.73 feet to the point of beginning.

I further certify that the above and foregoing is a true and correct plat of the same, and that the above description was prepared by L.S. 1533 on February 22nd, 2017.


Witness my hand and seal this 22nd day of February, 2017.



Copyright February, 2017.

# SURVEY PLAT


THIS PLAT OF SURVEY MEETS THE OKLAHOMA MINIMUM STANDARDS FOR THE PRACTICE OF LAND SURVEYING AS ADOPTED BY THE OKLAHOMA STATE BOARD OF REGISTRATION FOR PROFESSIONAL ENGINEERS AND LAND SURVEYORS.

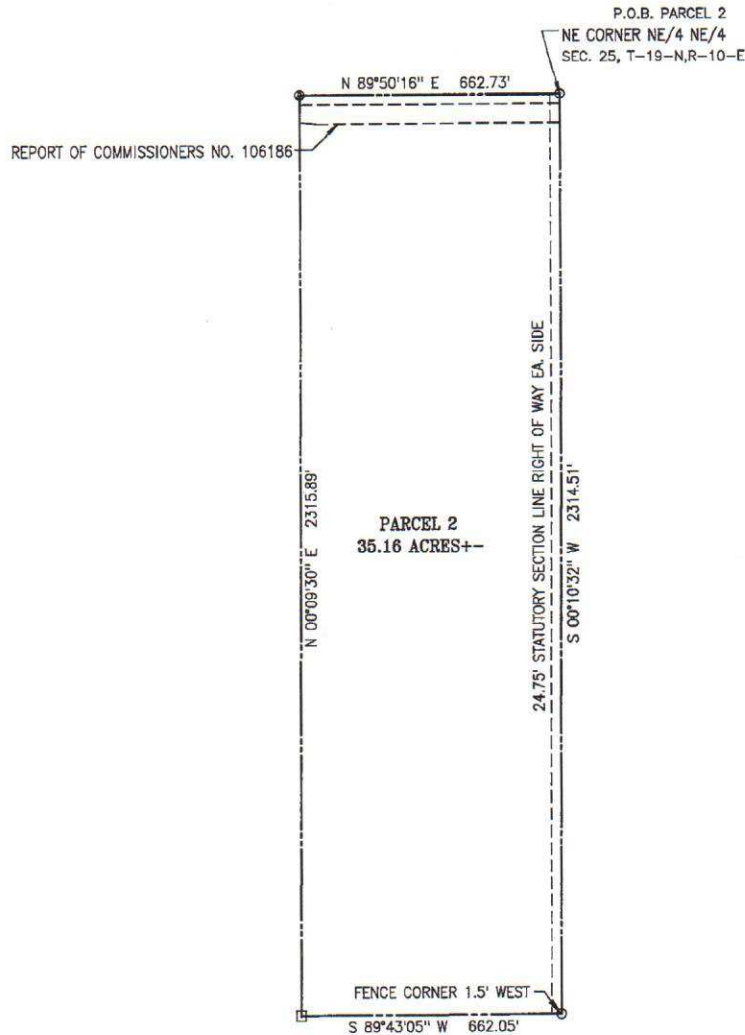

BASIS OF BEARINGS: TRUE BEARINGS DERIVED FROM GPS OBSERVATIONS

- ▲ DENOTES FOUND MAG NAIL
- DENOTES SET MAG NAIL W/FLASH
- ▣ DENOTES SET 1/2" IRON PIN W/CAP
- ⊙ DENOTES FOUND IRON PIN

THE WORD CERTIFY OR CERTIFICATE AS SHOWN AND USED HEREON MEANS AN EXPRESSION OF PROFESSIONAL OPINION REGARDING FACTS OF THE SURVEY AND DOES NOT CONSTITUTE A WARRANTY OR GUARANTEE, EXPRESSED OR IMPLIED.



## CERTIFICATE

I, Brett King, the undersigned, a Registered Professional Land Surveyor L.S. 1533, in the State of Oklahoma, of Landmark Surveying, C.A. 4572 6-30-17, of 245 South Taylor, P.O. Box 1328, Pryor, Oklahoma (918-825-2804) do hereby certify that a careful survey of the following described property was made under my supervision:

A tract of land being a part of the East Half of the Northeast Quarter of Section 25, Township 19 North, Range 10 East of the Indian Meridian and Principle Base Line, Tulsa County, Oklahoma, and being more particularly described as follows: Beginning at the Northeast corner of the Northeast Quarter of the Northeast Quarter, thence S 00°10'32" W along the East line of the Northeast Quarter a distance of 2314.51 feet to a 1/2" iron pin; thence S 89°43'05" W 662.05 feet to a 1/2" iron pin; thence N 00°09'30" E 2315.89 feet to a MAG nail on the North line of the Northeast Quarter; thence N 89°50'16" E 662.73 feet to the point of beginning.

I further certify that the above and foregoing is a true and correct plat of the same, and that the above description was prepared by L.S. 1533 on February 22nd, 2017.

Witness my hand and seal this 22nd day of February, 2017.




Copyright February, 2017.



# SURVEY PLAT

THIS PLAT OF SURVEY MEETS THE OKLAHOMA MINIMUM STANDARDS FOR THE PRACTICE OF LAND SURVEYING AS ADOPTED BY THE OKLAHOMA STATE BOARD OF REGISTRATION FOR PROFESSIONAL ENGINEERS AND LAND SURVEYORS.

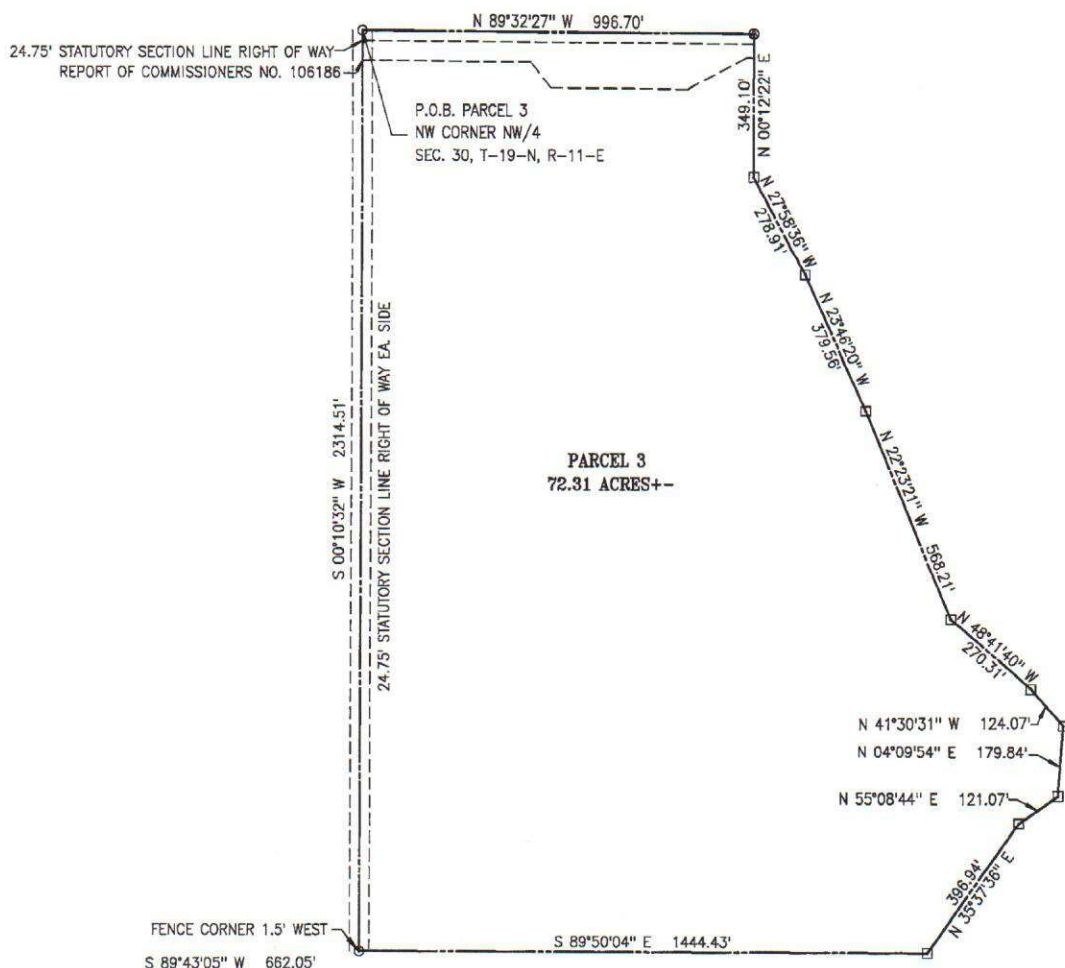

BASIS OF BEARINGS: TRUE BEARINGS DERIVED FROM GPS OBSERVATIONS

- ▲ DENOTES FOUND MAG NAIL
- DENOTES SET MAG NAIL W/FLASH
- ▣ DENOTES SET 1/2" IRON PIN W/CAP
- DENOTES FOUND IRON PIN

THE WORD CERTIFY OR CERTIFICATE AS SHOWN AND USED HEREON MEANS AN EXPRESSION OF PROFESSIONAL OPINION REGARDING FACTS OF THE SURVEY AND DOES NOT CONSTITUTE A WARRANTY OR GUARANTEE, EXPRESSED OR IMPLIED.

## CERTIFICATE

I, Brett King, the undersigned, a Registered Professional Land Surveyor L.S. 1533, in the State of Oklahoma, of Landmark Surveying, C.A. 4572 6-30-17, of 245 South Taylor, P.O. Box 1328, Pryor, Oklahoma (918-825-2804) do hereby certify that a careful survey of the following described property was made under my supervision:

A tract of land being a part of the Northwest Quarter of Section 30, Township 19 North, Range 11 East of the Indian Meridian and Principle Base Line, Tulsa County, Oklahoma, and being more particularly described as follows: Beginning at the Northwest corner of the Northwest Quarter of said Section 30, thence S 00°10'32" W 2314.51 feet to a 1/2" iron pin; thence S 89°50'04" E a distance of 1444.43 feet to a 1/2" iron pin; thence N 35°37'36" E 396.94 feet to a 1/2" iron pin; thence N 55°08'44" E 121.07 feet to a 1/2" iron pin; thence N 04°09'54" E 179.84 feet to a 1/2" iron pin; thence N 41°30'31" W 124.07 feet to a 1/2" iron pin; thence N 48°41'40" W 270.31 feet; thence N 22°23'21" W 568.21 feet to a 1/2" iron pin; thence N 23°46'20" W 379.56 feet to a 1/2" iron pin; thence N 27°58'36" W 278.91 feet to a 1/2" iron pin; thence N 00°12'22" E 349.10 feet to a MAG nail on the North line of the Northwest Quarter; thence N 89°32'27" W 996.70 feet to the point of beginning.

I further certify that the above and foregoing is a true and correct plat of the same, and that the above description was prepared by L.S. 1533 on February 22nd, 2017.

Witness my hand and seal this 22nd day of February, 2017.


*Brett King*



Copyright February, 2017.

# SURVEY PLAT


THIS PLAT OF SURVEY MEETS THE OKLAHOMA MINIMUM STANDARDS FOR THE PRACTICE OF LAND SURVEYING AS ADOPTED BY THE OKLAHOMA STATE BOARD OF REGISTRATION FOR PROFESSIONAL ENGINEERS AND LAND SURVEYORS.

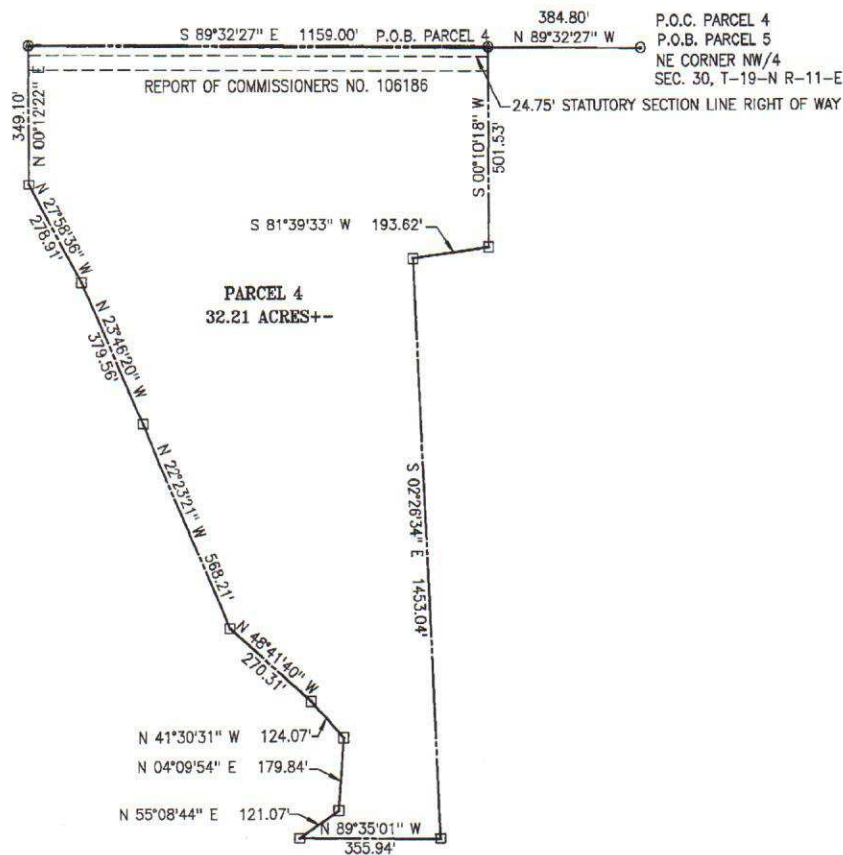

BASIS OF BEARINGS: TRUE BEARINGS DERIVED FROM GPS OBSERVATIONS

- ▲ DENOTES FOUND MAG NAIL
- DENOTES SET MAG NAIL W/FLASH
- ▣ DENOTES SET 1/2" IRON PIN W/CAP
- DENOTES FOUND IRON PIN

THE WORD CERTIFY OR CERTIFICATE AS SHOWN AND USED HEREON MEANS AN EXPRESSION OF PROFESSIONAL OPINION REGARDING FACTS OF THE SURVEY AND DOES NOT CONSTITUTE A WARRANTY OR GUARANTEE, EXPRESSED OR IMPLIED.



## CERTIFICATE

I, Brett King, the undersigned, a Registered Professional Land Surveyor L.S. 1533, in the State of Oklahoma, of Landmark Surveying, C.A. 4572 6-30-17, of 245 South Taylor, P.O. Box 1328, Pryor, Oklahoma (918-825-2804) do hereby certify that a careful survey of the following described property was made under my supervision:

A tract of land being a part of the Northwest Quarter of Section 30, Township 19 North, Range 11 East of the Indian Meridian and Principle Base Line, Tulsa County, Oklahoma, and being more particularly described as follows: Commencing at the Northeast corner of the Northwest Quarter of said Section 30, thence N 89°32'27" W along the North line of the Northwest Quarter a distance of 384.80 feet to a MAG nail and the point of beginning; thence S 00°10'18" W 501.53 feet to a 1/2" iron pin; thence S 81°39'33" W 193.62 feet to a 1/2" iron pin; thence S 02°26'34" E 1453.04 feet to a 1/2" iron pin; thence N 89°35'01" W a distance of 355.94 feet to a 1/2" iron pin; thence N 55°08'44" E 121.07 feet to a 1/2" iron pin; thence N 04°09'54" E 179.84 feet to a 1/2" iron pin; thence N 41°30'31" W 124.07 feet to a 1/2" iron pin; thence N 48°41'40" W 270.31 feet; thence N 22°23'21" W 568.21 feet to a 1/2" iron pin; thence N 23°46'20" W 379.56 feet to a 1/2" iron pin; thence N 27°58'36" W 278.91 feet to a 1/2" iron pin; thence N 00°12'22" E 349.10 feet to a MAG nail on the North line of the Northwest Quarter; thence S 89°32'27" E 1159.00 feet to the point of beginning.

I further certify that the above and foregoing is a true and correct plat of the same, and that the above description was prepared by L.S. 1533 on February 22nd, 2017.

Witness my hand and seal this 22nd day of February, 2017.


*Brett King*



Copyright © 2017

# SURVEY PLAT

THIS PLAT OF SURVEY MEETS THE OKLAHOMA MINIMUM STANDARDS FOR THE PRACTICE OF LAND SURVEYING AS ADOPTED BY THE OKLAHOMA STATE BOARD OF REGISTRATION FOR PROFESSIONAL ENGINEERS AND LAND SURVEYORS.

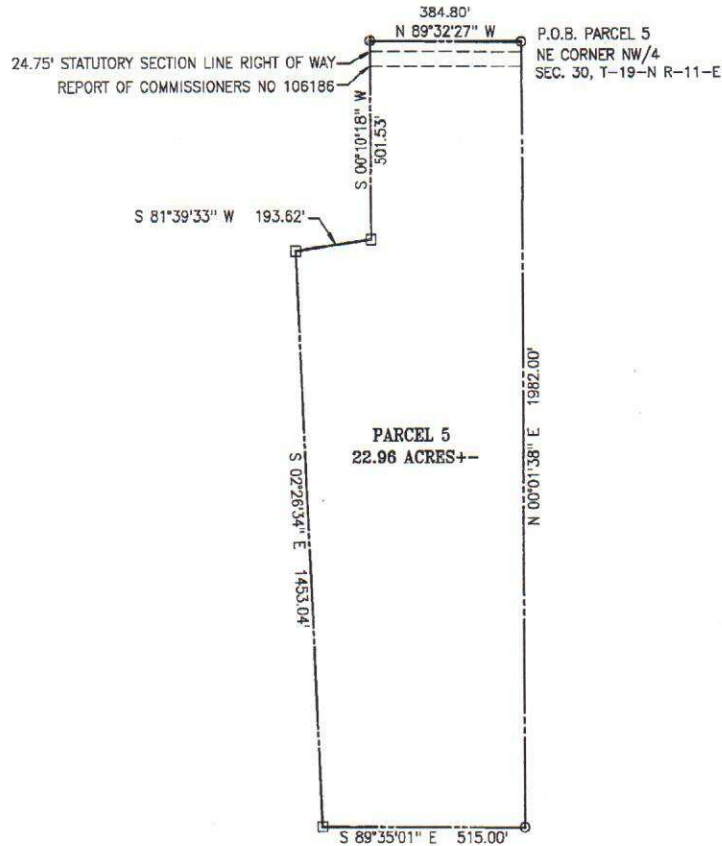

BASIS OF BEARINGS: TRUE BEARINGS DERIVED FROM GPS OBSERVATIONS

- ▲ DENOTES FOUND MAG NAIL
- DENOTES SET MAG NAIL W/FLASH
- ▣ DENOTES SET 1/2" IRON PIN W/CAP
- DENOTES FOUND IRON PIN

THE WORD CERTIFY OR CERTIFICATE AS SHOWN AND USED HEREON MEANS AN EXPRESSION OF PROFESSIONAL OPINION REGARDING FACTS OF THE SURVEY AND DOES NOT CONSTITUTE A WARRANTY OR GUARANTEE, EXPRESSED OR IMPLIED.

## CERTIFICATE

I, Brett King, the undersigned, a Registered Professional Land Surveyor L.S. 1533, in the State of Oklahoma, of Landmark Surveying, C.A. 4572 6-30-17, of 245 South Taylor, P.O. Box 1328, Pryor, Oklahoma (918-825-2804) do hereby certify that a careful survey of the following described property was made under my supervision:

A tract of land being a part of the Northwest Quarter of Section 30, Township 19 North, Range 11 East of the Indian Meridian and Principle Base Line, Tulsa County, Oklahoma, and being more particularly described as follows: Beginning at the Northeast corner of the Northwest Quarter, thence N 89°32'27" W along the North line of the Northwest Quarter a distance of 384.80 feet to a MAG nail; thence S 00°10'18" W 501.53 feet to a 1/2" iron pin; thence S 81°39'33" W 193.62 feet to a 1/2" iron pin; thence S 02°26'34" E 1453.04 feet to a 1/2" iron pin; thence S 89°35'01" E 515.00 feet to a 1/2" iron pin on the East line of the Northwest Quarter; thence N 00°01'38" E 1982.00 feet to the point of beginning.

I further certify that the above and foregoing is a true and correct plat of the same, and that the above description was prepared by L.S. 1533 on February 22nd, 2017.

Witness my hand and seal this 22nd day of February, 2017.

*Brett King*




Copyright February, 2017.



# SURVEY PLAT


THIS PLAT OF SURVEY MEETS THE OKLAHOMA MINIMUM STANDARDS FOR THE PRACTICE OF LAND SURVEYING AS ADOPTED BY THE OKLAHOMA STATE BOARD OF REGISTRATION FOR PROFESSIONAL ENGINEERS AND LAND SURVEYORS.

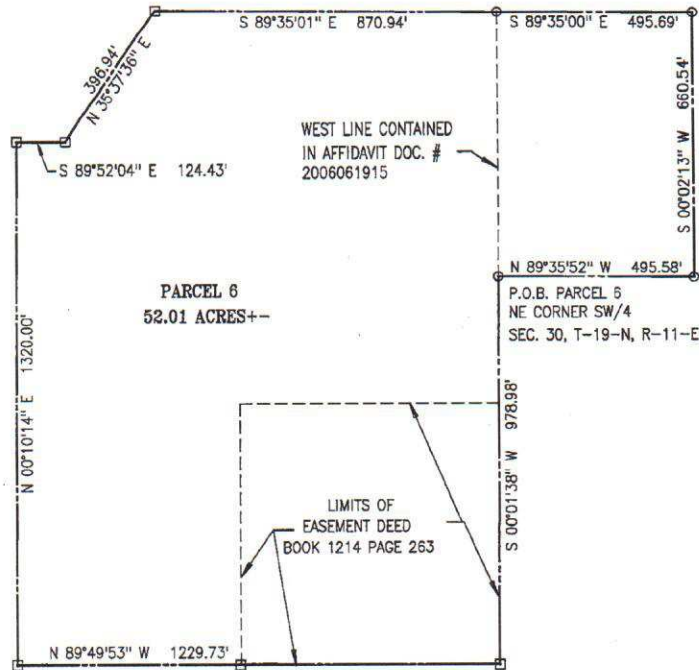

BASIS OF BEARINGS: TRUE BEARINGS DERIVED FROM GPS OBSERVATIONS

- ▲ DENOTES FOUND MAG NAIL
- DENOTES SET MAG NAIL W/FLASH
- DENOTES SET 1/2" IRON PIN W/CAP
- DENOTES FOUND IRON PIN

THE WORD CERTIFY OR CERTIFICATE AS SHOWN AND USED HEREON MEANS AN EXPRESSION OF PROFESSIONAL OPINION REGARDING FACTS OF THE SURVEY AND DOES NOT CONSTITUTE A WARRANTY OR GUARANTEE, EXPRESSED OR IMPLIED.



## CERTIFICATE

I, Brett King, the undersigned, a Registered Professional Land Surveyor L.S. 1533, in the State of Oklahoma, of Landmark Surveying, C.A. 4572 6-30-17, of 245 South Taylor, P.O. Box 1328, Pryor, Oklahoma (918-825-2804) do hereby certify that a careful survey of the following described property was made under my supervision:

A tract of land being a part of Section 30, Township 19 North, Range 11 East of the Indian Meridian and Principle Base Line, Tulsa County, Oklahoma, and being more particularly described as follows: Beginning at the Northeast corner of the Southwest Quarter, thence S 00°01'38" W along the East line of the Southwest Quarter a distance of 978.98 feet to a 1/2" iron pin; thence N 89°49'53" W 1229.73 feet to a 1/2" iron pin; thence N 00°10'14" E 1320.00 feet to a 1/2" iron pin; thence S 89°52'04" E 124.43 feet to a 1/2" iron pin; thence N 35°37'36" E 396.94 feet to a 1/2" iron pin; thence S 89°35'01" E 870.94 feet to a 1/2" iron pin on the East line of the Northwest Quarter; thence S 89°35'00" E 495.69 feet to a 1/2" iron pin; thence S 00°02'13" W 660.54 feet to an existing iron pin on the South line of the Northeast Quarter; thence N 89°35'52" W 495.58 feet to the point of beginning.

I further certify that the above and foregoing is a true and correct plat of the same, and that the above description was prepared by L.S. 1533 on February 22nd, 2017.

Witness my hand and seal this 22nd day of February, 2017.


*Brett King*



Copyright February, 2017.

# SURVEY PLAT

THIS PLAT OF SURVEY MEETS THE OKLAHOMA MINIMUM STANDARDS FOR THE PRACTICE OF LAND SURVEYING AS ADOPTED BY THE OKLAHOMA STATE BOARD OF REGISTRATION FOR PROFESSIONAL ENGINEERS AND LAND SURVEYORS.

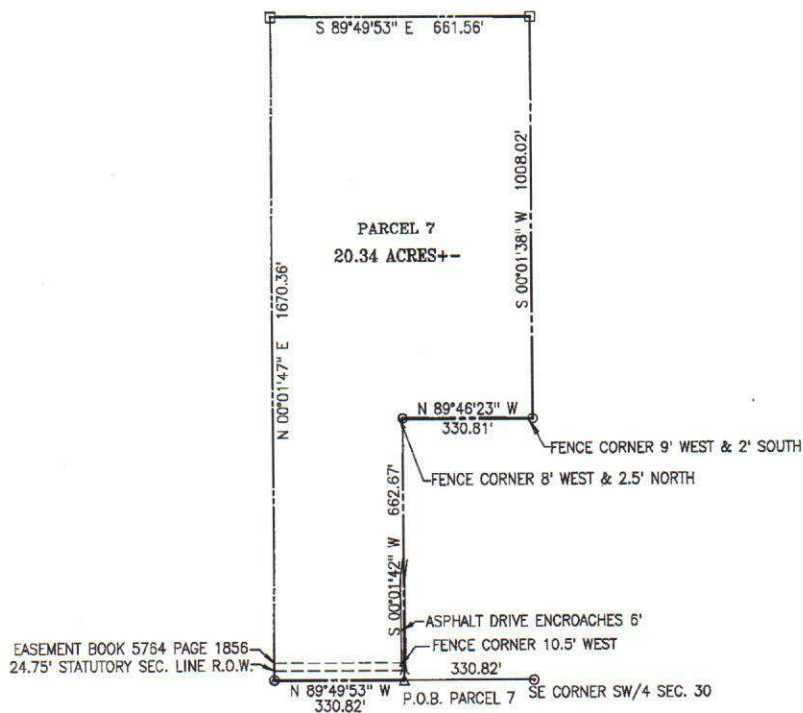

BASIS OF BEARINGS: TRUE BEARINGS DERIVED FROM GPS OBSERVATIONS

- ▲ DENOTES FOUND MAG NAIL
- DENOTES SET MAG NAIL W/FLASH
- ⊠ DENOTES SET 1/2" IRON PIN W/CAP
- DENOTES FOUND IRON PIN

THE WORD CERTIFY OR CERTIFICATE AS SHOWN AND USED HEREON MEANS AN EXPRESSION OF PROFESSIONAL OPINION REGARDING FACTS OF THE SURVEY AND DOES NOT CONSTITUTE A WARRANTY OR GUARANTEE, EXPRESSED OR IMPLIED.



## CERTIFICATE

I, Brett King, the undersigned, a Registered Professional Land Surveyor L.S. 1533, in the State of Oklahoma, of Landmark Surveying, C.A. 4572 6-30-17, of 245 South Taylor, P.O. Box 1328, Pryor, Oklahoma (918-825-2804) do hereby certify that a careful survey of the following described property was made under my supervision:

A tract of land being a part of the Southwest Quarter of Section 30, Township 19 North, Range 11 East of the Indian Meridian and Principle Base Line, Tulsa County, Oklahoma, and being more particularly described as follows: Beginning at a point on the South line of the Southwest Quarter and 330.82 feet from the Southeast corner thereof; thence N 89°49'53" W along the South line of the Southwest Quarter a distance of 330.82 feet to a MAG nail; thence N 00°01'47" E 1570.36 feet to a 1/2" iron pin; thence S 89°49'53" E 661.56 feet to a 1/2" iron pin; thence S 00°01'38" W 1008.02 feet to an existing iron pin; thence N 89°56'23" W 330.81 feet to a 1/2" iron pin; thence S 00°01'42" W 662.67 feet to the point of beginning.

I further certify that the above and foregoing is a true and correct plat of the same, and that the above description was prepared by L.S. 1533 on February 22nd, 2017.

Witness my hand and seal this 22nd day of February, 2017.

*Brett King*




Copyright February, 2017.



# SURVEY PLAT


THIS PLAT OF SURVEY MEETS THE OKLAHOMA MINIMUM STANDARDS FOR THE PRACTICE OF LAND SURVEYING AS ADOPTED BY THE OKLAHOMA STATE BOARD OF REGISTRATION FOR PROFESSIONAL ENGINEERS AND LAND SURVEYORS.

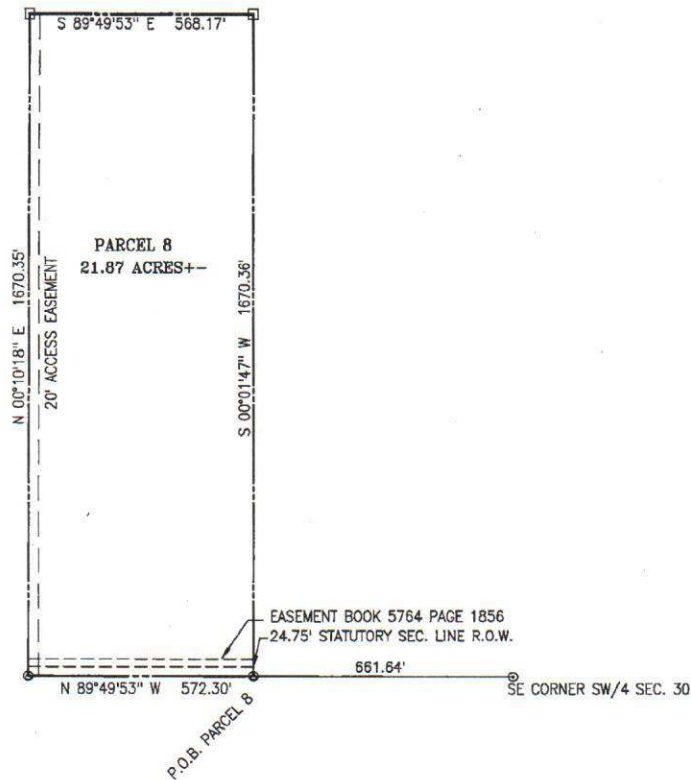

BASIS OF BEARINGS: TRUE BEARINGS DERIVED FROM GPS OBSERVATIONS

- ▲ DENOTES FOUND MAG NAIL
- DENOTES SET MAG NAIL W/FLASH
- ▣ DENOTES SET 1/2" IRON PIN W/CAP
- ⊙ DENOTES FOUND IRON PIN

THE WORD CERTIFY OR CERTIFICATE AS SHOWN AND USED HEREON MEANS AN EXPRESSION OF PROFESSIONAL OPINION REGARDING FACTS OF THE SURVEY AND DOES NOT CONSTITUTE A WARRANTY OR GUARANTEE, EXPRESSED OR IMPLIED.



## CERTIFICATE

I, Brett King, the undersigned, a Registered Professional Land Surveyor L.S. 1533, in the State of Oklahoma, of Landmark Surveying, C.A. 4572 6-30-17, of 245 South Taylor, P.O. Box 1328, Pryor, Oklahoma (918-825-2804) do hereby certify that a careful survey of the following described property was made under my supervision:

A tract of land being a part of the Southwest Quarter of Section 30, Township 19 North, Range 11 East of the Indian Meridian and Principle Base Line, Tulsa County, Oklahoma, and being more particularly described as follows: Beginning at a point on the South line of the Southwest Quarter and 661.64 feet from the Southeast corner thereof; thence N 89°49'53" W along the South line of the Southwest Quarter a distance of 572.30 feet to a MAG nail; thence N 00°10'18" E 1670.35 feet to a 1/2" iron pin; thence S 89°49'53" E 568.17 feet to a 1/2" iron pin; thence S 00°01'47" W 1670.36 feet to the point of beginning.

I further certify that the above and foregoing is a true and correct plat of the same and that the above description was prepared by L.S. 1533 on February 22nd, 2017.


Witness my hand and seal this 22nd day of February, 2017.



Copyright February, 2017.

# SURVEY PLAT


THIS PLAT OF SURVEY MEETS THE OKLAHOMA MINIMUM STANDARDS FOR THE PRACTICE OF LAND SURVEYING AS ADOPTED BY THE OKLAHOMA STATE BOARD OF REGISTRATION FOR PROFESSIONAL ENGINEERS AND LAND SURVEYORS.

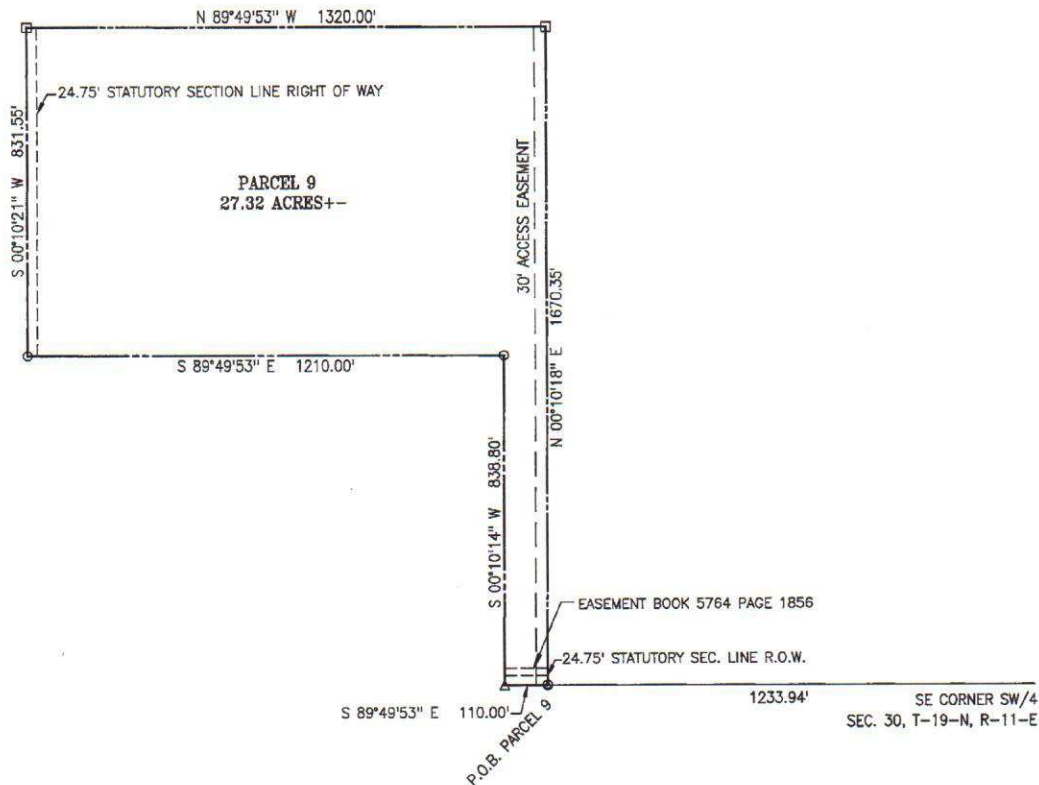

BASIS OF BEARINGS: TRUE BEARINGS DERIVED FROM GPS OBSERVATIONS

- ▲ DENOTES FOUND MAG NAIL
- DENOTES SET MAG NAIL W/FLASH
- ▣ DENOTES SET 1/2" IRON PIN W/CAP
- DENOTES FOUND IRON PIN

THE WORD CERTIFY OR CERTIFICATE AS SHOWN AND USED HEREON MEANS AN EXPRESSION OF PROFESSIONAL OPINION REGARDING FACTS OF THE SURVEY AND DOES NOT CONSTITUTE A WARRANTY OR GUARANTEE, EXPRESSED OR IMPLIED.



## CERTIFICATE

I, Brett King, the undersigned, a Registered Professional Land Surveyor L.S. 1533, in the State of Oklahoma, of Landmark Surveying, C.A. 4572 6-30-17, of 245 South Taylor, P.O. Box 1328, Pryor, Oklahoma (918-825-2804) do hereby certify that a careful survey of the following described property was made under my supervision:

A tract of land being a part of the Southwest Quarter of Section 30, Township 19 North, Range 11 East of the Indian Meridian and Principle Base Line, Tulsa County, Oklahoma, and being more particularly described as follows: Beginning at a point on the South line of the Southwest Quarter and 1233.94 feet from the Southeast corner thereof; thence N 00°10'18" E 1670.35 feet to a 1/2" iron pin; thence N 89°49'53" W 1320.00 feet to a 1/2" iron pin on the West line of the Southwest Quarter; thence S 00°10'21" W along the West line of the Southwest Quarter a distance of 831.55 feet to a 1/2" iron pin; thence S 89°49'53" E 1210.00 feet to a 1/2" iron pin; thence S 00°10'14" W 838.80 feet to a MAG nail on the South line of the Southwest Quarter; thence S 89°49'53" E 110.00 feet to the point of beginning.

I further certify that the above and foregoing is a true and correct plat of the same and that the above description was prepared by L.S. 1533 on February 22nd, 2017.


Witness my hand and seal this 22nd day of February, 2017.



Copyright February, 2017.

# SURVEY PLAT


THIS PLAT OF SURVEY MEETS THE OKLAHOMA MINIMUM STANDARDS FOR THE PRACTICE OF LAND SURVEYING AS ADOPTED BY THE OKLAHOMA STATE BOARD OF REGISTRATION FOR PROFESSIONAL ENGINEERS AND LAND SURVEYORS.

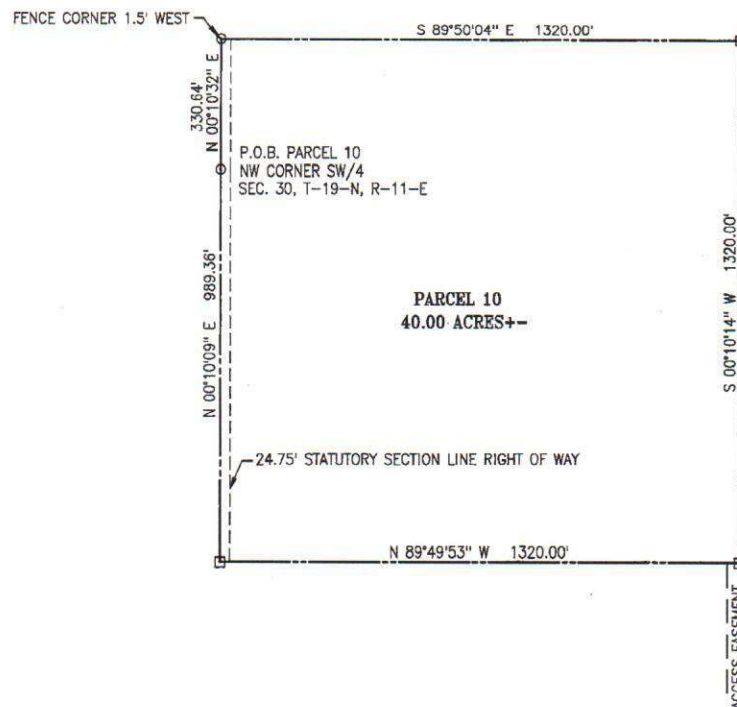

BASIS OF BEARINGS: TRUE BEARINGS DERIVED FROM GPS OBSERVATIONS

- ▲ DENOTES FOUND MAG NAIL
- ⊙ DENOTES SET MAG NAIL W/FLASH
- ⊠ DENOTES SET 1/2" IRON PIN W/CAP
- DENOTES FOUND IRON PIN

THE WORD CERTIFY OR CERTIFICATE AS SHOWN AND USED HEREON MEANS AN EXPRESSION OF PROFESSIONAL OPINION REGARDING FACTS OF THE SURVEY AND DOES NOT CONSTITUTE A WARRANTY OR GUARANTEE, EXPRESSED OR IMPLIED.



## CERTIFICATE

I, Brett King, the undersigned, a Registered Professional Land Surveyor L.S. 1533, in the State of Oklahoma, of Landmark Surveying, C.A. 4572 6-30-17, of 245 South Taylor, P.O. Box 1328, Pryor, Oklahoma (918-825-2804) do hereby certify that a careful survey of the following described property was made under my supervision:

A tract of land being a part of the West Half of Section 30, Township 19 North, Range 11 East of the Indian Meridian and Principle Base Line, Tulsa County, Oklahoma, and being more particularly described as follows: Beginning at the Northwest corner of the Southwest Quarter, thence N 00°10'32" E 330.64 feet to an existing iron pin; thence S 89°50'04" E 1320.00 feet to a 1/2" iron pin; thence S 00°10'14" W 1320.00 feet to a 1/2" iron pin; thence N 89°49'53" W 1320.00 feet to a 1/2" iron pin on the West line of the Southwest Quarter; thence N 00°10'09" E 989.36 feet to the point of beginning.

I further certify that the above and foregoing is a true and correct plat of the same and that the above description was prepared by L.S. 1533 on February 22nd, 2017.

Witness my hand and seal this 22nd day of February, 2017.



Copyright February, 2017.



# LANDMARK SURVEYING, L.L.C.

Brett King, L.S.

245 South Taylor Street

Pryor, Ok. 74361

PHONE 918-825-2804

C.A. 4572 EXP. 6/30/2017

## EASEMENT IN SECTION 30, TOWNSHIP 19 NORTH, RANGE 11 EAST, TULSA COUNTY, OKLAHOMA

A 50 foot strip of land located in the Southwest Quarter of Section 30, Township 19 North, Range 11 East, Tulsa County, Oklahoma, and being more particularly described as follows: Said strip being 30 feet wide on the West side and 20 feet wide on the East side of the following described centerline, Beginning at a point on the South line of the Southwest Quarter of Section 30, and 1233.94 feet West of the Southeast corner of the Southwest Quarter, thence N 00°10'18" E a distance of 1670.35 feet to the point of termination of said easement.

Witness my hand and seal this 1<sup>st</sup> day of March, 2017.

*Brett King*  
Brett King-Land Surveyor

